

PRE-INCIDENT SURVEYBuilding Name: Adamsville Church of God Survey #: 83Street Address: 4768 Cherry Run RoadCity, State, Zip: Washington NC 27889Primary Use: Church Construction Type: Cinder BlockPossible Entry: A' - 1 entry doors B' - 1 door C' - 1 door D - 1 door

Possible Occupancy: A.M. _____ P.M. _____

Known Handicapped Personnel: _____

NOTIFY IN CASE OF EMERGENCY

Name: _____ Name: _____

Phone: 946 3612 Phone: _____**BUILDING CONSTRUCTION**Roof Type: A - Frame Floor Construction: Concrete / Wood joistRoof Construction: Wood trussBasement Construction Type: - Height of Basement: -Number of Stories: 1 Height of Each Story: 15'Length: 115 Width: 65' Height: 15'

Attic Area: _____ Size: L _____ X W _____ X H _____

UTILITY TYPESGas: Franklin F. Ray Moore Type: LP (500g)Gas Shut Off Valve Location: @ tankElectric: Washington Ut. Phase: SinglePanel Location: 'B' side left wall

Alarm Location: _____

EXPOSURESNorth: 30' FT. West: 40' - 45' FT. South: _____ FT. East: _____Type: LP Gas Tank Type: Storage building Type: _____House

SUPPRESSION CRITERIA

Needed Fire Flow: _____ Total Water Supply: _____

Fuel Load: _____ Rate of Flow: _____

HYDRANT LOCATIONS

(1) _____ Flow: _____ Unit: _____

(2) _____ Flow: _____ Unit: _____

(3) _____ Flow: _____ Unit: _____

(4) _____ Flow: _____ Unit: _____

OTHER WATER RESOURCES

(1) _____

(2) _____

(3) _____

SPECIAL RESOURCES

(1) _____

(2) _____

(3) _____

MUTUAL AID

(1) _____ Assignment: _____

(2) _____ Assignment: _____

(3) _____ Assignment: _____

STAGING AREA


Primary: _____

Secondary: _____

MISCELLANEOUS INFORMATION

Sprinkler Connection: _____

Standpipe Connection: _____

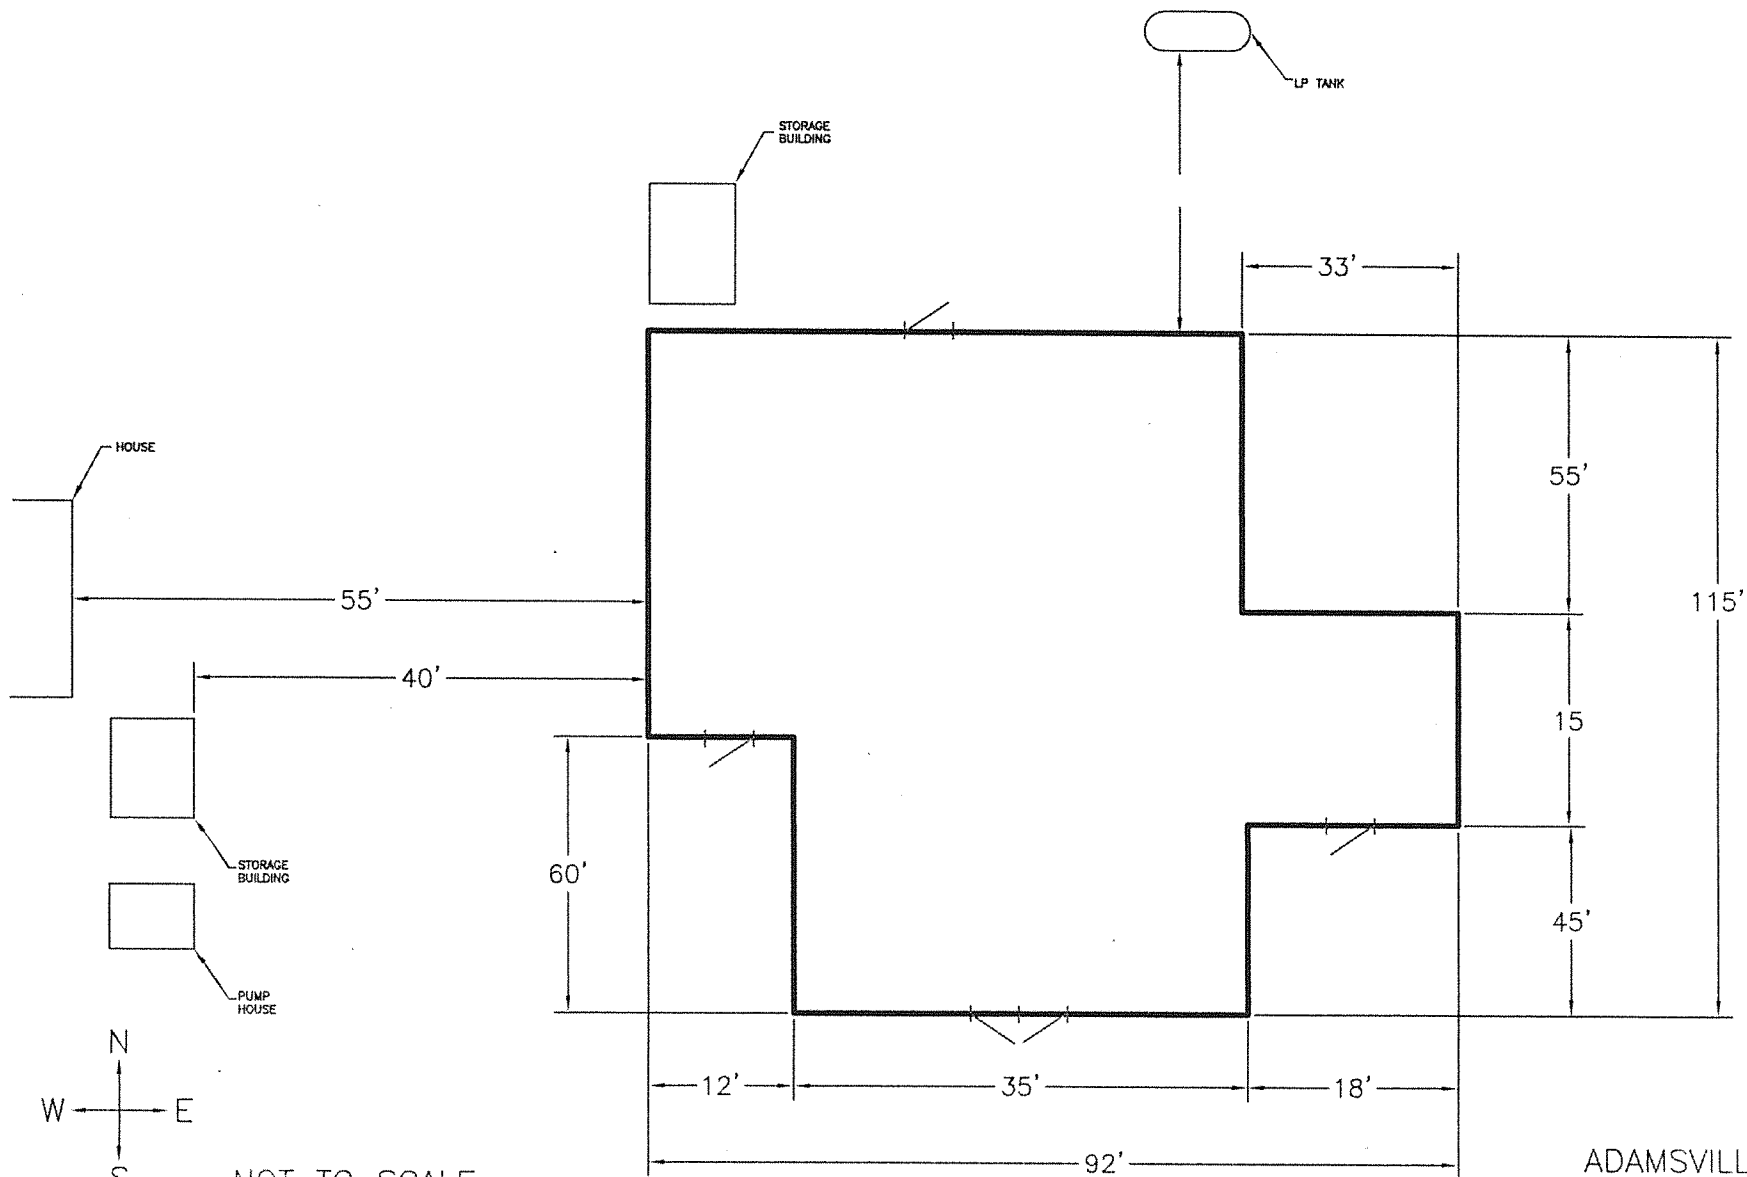


ADAMSVILLE C.O.G.



Address: 4768 Cherry Run Rd

Pre-Plan #: _____

Name: Adamsville Church of God

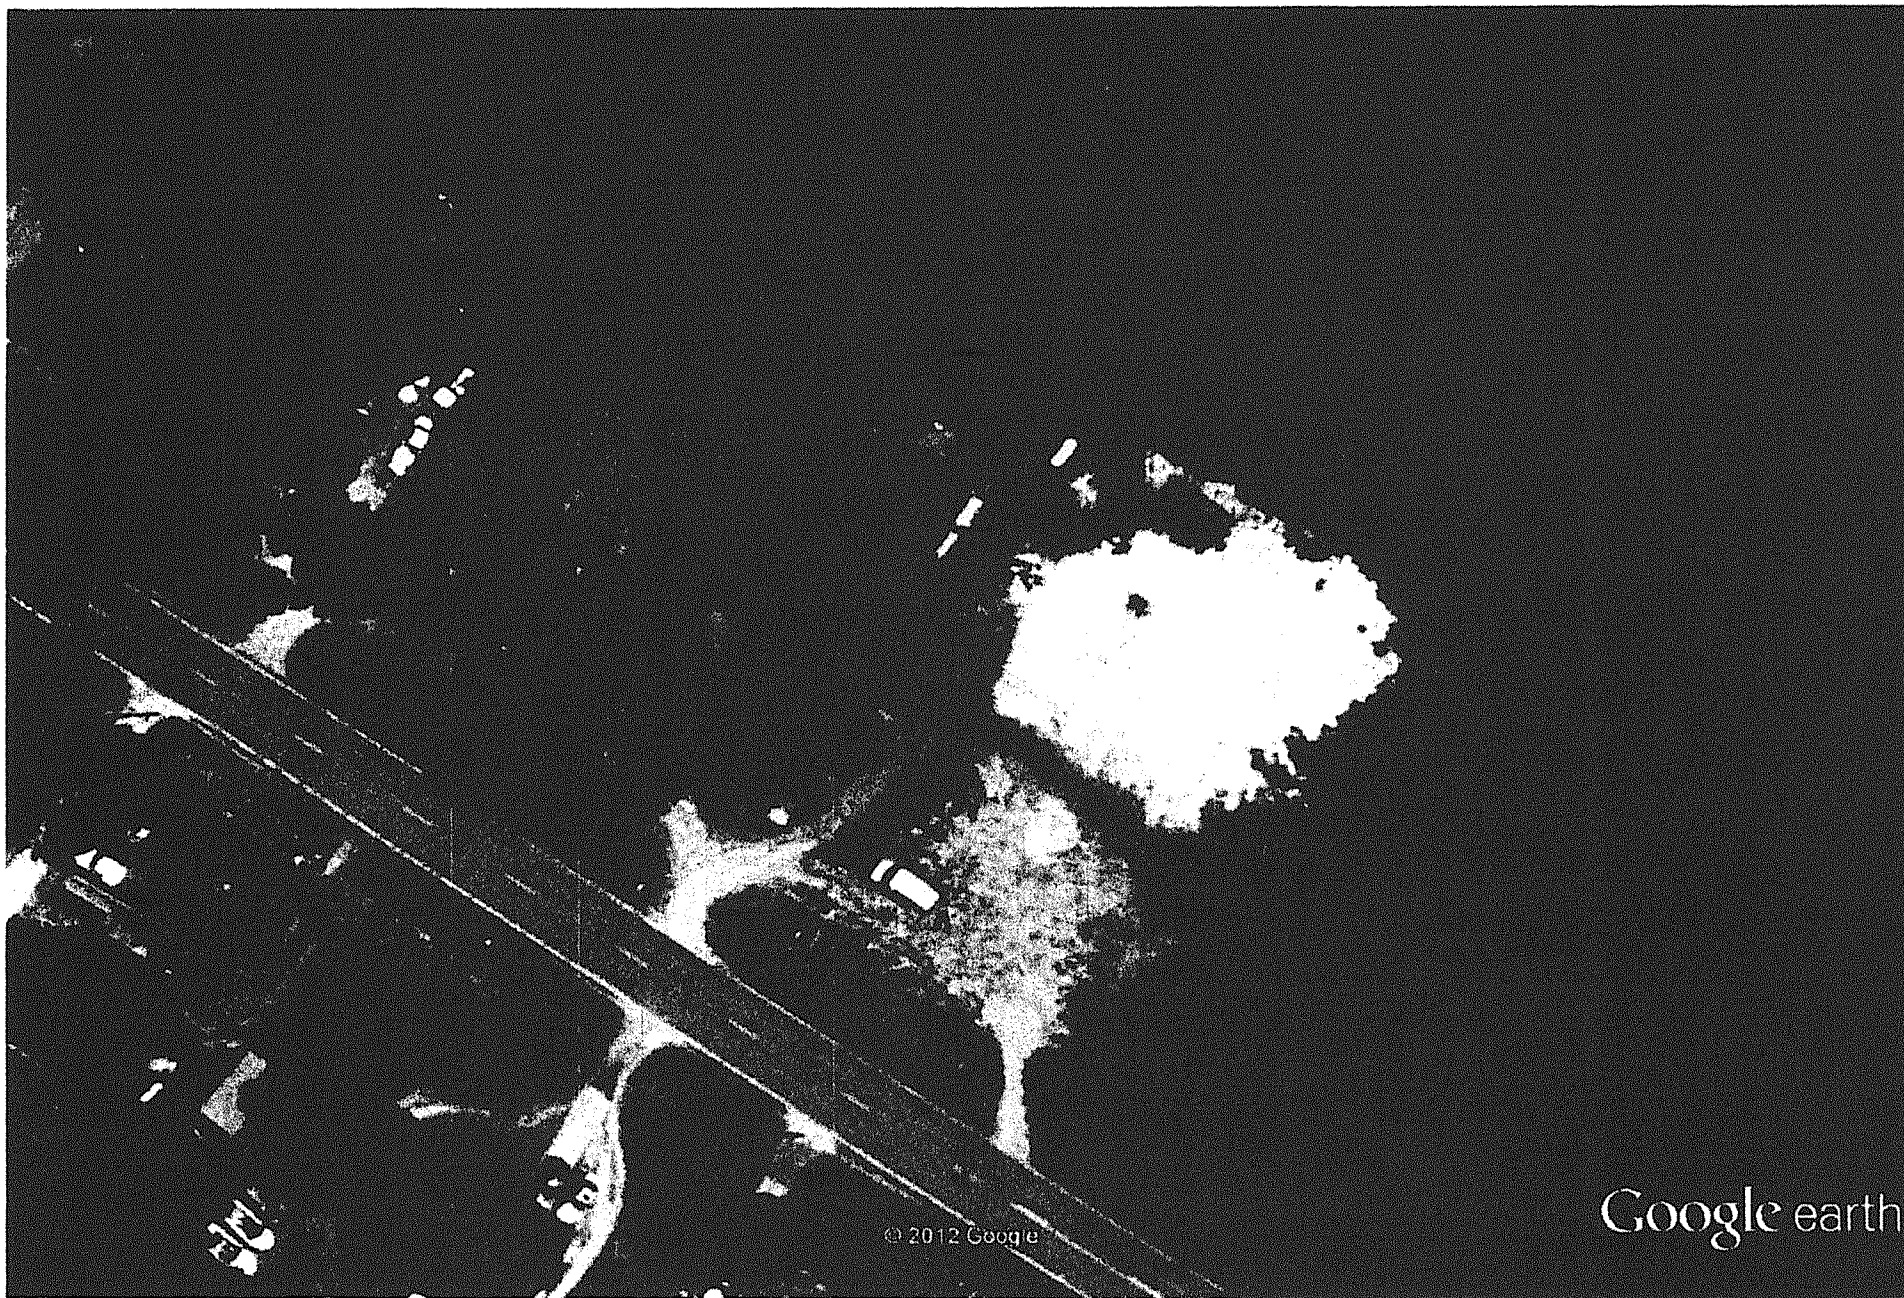

Go gle earth

feet
meters

300

100

*Adamsville Church of God
4768 Cherry Run Rd.*



Structure Name Adamsville Church of God
 Structure Address 4768 Cherry Run Road.

Length	Width	Sq Ft	Sq Root	X 18	X construction type	GPM sum 1	X Occupancy	GPM sum 2
115	65	7475	86.46	1556.25	0.8	1245.00	0.85	1058.25

Column F
Fire Resistive 0.6
Non-combustible 0.8
Ordinary 1
Wood Frame 1.5

Column H
.75 if Mostly non-combustible contents
.85 if Limited combustibles (apartments, churches, schools, hospitals)
1.0 if Mostly combustible (restraunts, sheds, garages)
1.15 if Free burning contents (post offices, horse stables, feed mills, repair garages, ag storage)
1.25 if Rapid burning (aircraft hangers, tires, flammable liquids, wood working)

Exposure % add	Exposure add GPM	Exposure per side (75% max) Total Side A	Exposure per side 75% max Side B	Exposure per side 75% max Side C	Exposure per side 75% max Side D	Total GPM with exposures
25%	264.56		0	0		
19%	201.07					
14%	148.15					
9%	95.24					
75%	793.89					
MAX						

Column J, K, L and M
If up to 10 feet add 25% per side
If 11 to 30 feet add 19% per side
If 31 to 60 feet add 14% per side
If 61 to 100 feet add 9% per side

Total GPM with exposures	Add 50% for each floor above ground floor	# of floors	Total to add for floors above	Sub-total with floors added	If wood shingles on roof add 500 GPM
	500	0	0.00	1000.00	0
					1000.00

FIRE FLOW NEEDED
GPM
1000.00